

- 4½" full-size bourdon tube
- Patented Duratube™ with as-welded-tube construction controls stress for longer life
- "Round Cap Tip" construction lowers stresses for longer life
- Easily adjustable, self-locking micrometer pointer
- Burn-resistant phenol turret case
- Exclusive Teflon coated 400 series stainless steel rotary movement for longer life
- New PLUS!™ Performance Option:
 - Liquid-filled performance in a dry gauge
 - Fights vibration and pulsations without liquid-filled headaches

- See pages 6-7 for details
- Order as option XLL
- Epoxy-coated system for superior corrosion resistance

Type 1279 Duragauge® pressure gauge is offered in 4½" phenolic case for superior chemical and heat resistance. Solid-front case design with blow-out back for safety. Dry, liquid-filled, hermetically sealed, weatherproof or **PLUS!** options available. Field convertible to liquid-fill with conversion kit (detailed on page 243). All case styles provide full temperature compensation.



BOURDON SYSTEM SELECTION

Ordering Code	Bourdon Tube & Tip Material ⁽¹⁾ (all joints TIG welded except "A")	Socket Material	Tube Type	Range Selection Limits (psi)	NPT Conn. ⁽²⁾
A	Phosphor Bronze Tube-Brass Tip, Silver Brazed	Brass	C-Tube	12/1000	¼, ½
R	316L stainless steel	1019 steel	C-Tube	12/1500	¼, ½
			Helical	2000/20,000	¼, ½
S	316L stainless steel	316L stainless steel	C-Tube	12/1500	¼, ½
			Helical	2000/20,000	¼, ½
P ⁽³⁾	K Monel	Monel 400	C-Tube	15/1500	¼, ½
			Helical	2000/30,000	¼, ½ ⁽⁴⁾

- (1) For selection of the correct bourdon system material, see the media application table on page 243.
 (2) Other connections available on application.
 (3) Use for applications where NACE standard MR-01-75 is specified.
 (4) 30,000 psi range supplied with ¼ high pressure connection, ½ NPT optional.

STANDARD RANGES

Pressure psi	Compound psi
0/15	30 in.Hg/15 psi
0/30	30 in.Hg/30 psi
0/60	30 in.Hg/60 psi
0/100	30 in.Hg/100 psi
0/160	30 in.Hg/150 psi
0/200	30 in.Hg/300 psi
0/300	
0/400	Vacuum
0/600	30/0 in.Hg
0/800	34/0 ftH ₂ O
0/1000	
0/1500	
0/2000	
0/3000	
0/5000	
0/10,000	
0/20,000	
0/30,000	

NOTE:
Equivalent standard kg/cm², and kPa metric ranges are available.

TO ORDER THIS 1279 DURAGAUGE:

Select: _____ 45 1279 SS* 04L XXX 2000#

1. Dial size—4½" _____

2. Case type—1279 _____
Ring-threaded reinforced polypropylene

3. Bourdon system selection ordering code _____


4. Connection—¼ NPT (02), ½ NPT (04), Lower (L), Back (B) _____

5. Optional features—see page 239 _____

6. Standard pressure range _____

7. Accessories—see pages 233-238 _____

(*) "S" denotes solid front case design

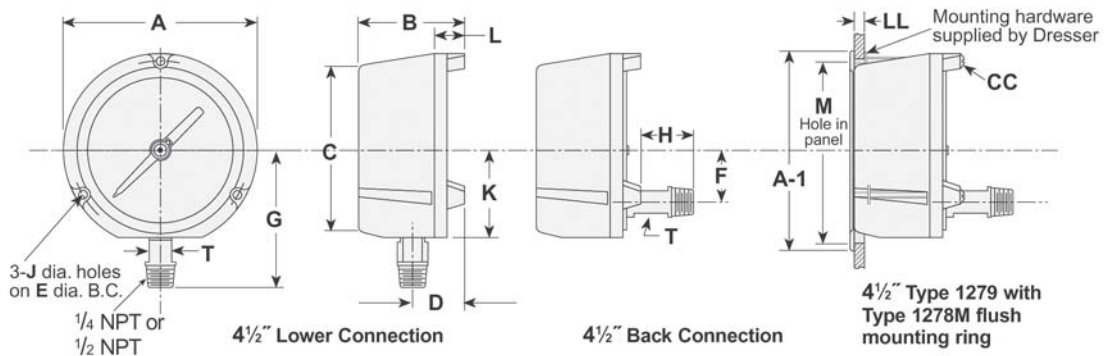

Dial Size Inches	A	B	C	D	E	F	G	H	J	L	T	V	Weight (lbs)
4 1/2	5 13/16 (148)	3 3/8 (86)	5 1/16 (129)	1 5/8 (41)	5 3/8 (137)	1 5/8 (41)	3 15/16 (100)	3/4 (20)	1 (25)	.218 (6)	5/8 (16)	2 5/8 (67)	2 1/2

Type 1278 Flush Mounting Ring Gauge Type	A-1	M	CC	LL
4 1/2" Types 1279 & 1379	6 (152)	5 3/8 (136)	#10-24	1/8 - 5/16 (3)-(8)